




• LAP TIMERS • LOGGERS • CAMERAS • DASHES • SENSORS • AND MORE


SHOP NOW

AiM MX UTV

Dash logger



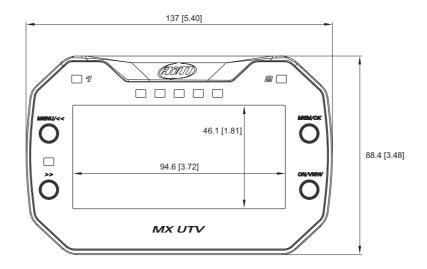

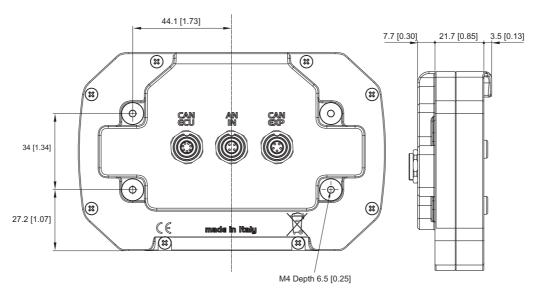

Ver. 1.00







AIM MX UTV

Dash logger

Technical specifications

Display resolution 268 x 128 pixels

Backlight 7 configurable RGB colors

Ambient Light sensor Yes

Shift Lights 5 configurable RGB LEDs

Alarm LEDs 2 configurable RGB LEDs

CAN connection Yes

ECU connection Models: Channels:

Polaris RZR non turbo: Speed, RPM, Gear, ECT, TPS, BrakeSW, Fuel Rate

Polaris RZR turbo: Speed, RPM, Gear, ECT, TPS, BrakeSW, Fuel Rate, Boost pressure,

Charge Air temp (from request)

CAN-AM non turbo: Speed, RPM, Gear, ECT, TPS, BrakeSW, instant fuel flow, Low Oil Pressure

(as alarm function only, no data)

CAN-AM turbo: Speed, RPM, Gear, ECT, TPS, BrakeSW, Instant Fuel consumed, Boost Pressure,

Intake Air temp

Yamaha YXZ 2016: Speed, RPM, Gear, ECT

Yamaha YXZ 2017: Speed, RPM, Gear, ECT, TPS, BrakeSW

Arctic Cat Wildcat: Speed, RPM, Gear, ECT, TPS, BrakeSW

GPS Integrated

External modules Lambda Controller, SmartyCam HD

Analog inputs 1

WiFi connection Yes

Internal memory 4 GB

Body Glass fiber reinforced Nylon

Pushbuttons Metallic

Connectors 3 Binder connectors

Dimensions 137 x 88.4 x 31.9 mm

Weight 330 g

Waterproof IP65

Part number


X85MXUTV001 MX UTV



AiM MX UTV

Dash logger

Pinout

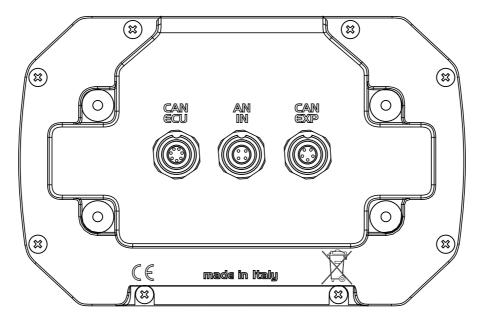

CAN ECU



7 pins Binder 712 female connector pinout front view

AN IN



4 pins Binder 712 female connector pinout front view



CAN

5 pins Binder 712 female connector pinout front view

| ECU connector | |
|---------------|----------|
| 1 | CAN ECU+ |
| 2 | CAN ECU- |
| 3 | +Vbext |
| 4 | RS232TX |
| 5 | RS232RX |
| 6 | K-Line |
| 7 | GND |

| Analog Input connector | |
|------------------------|----------------|
| 1 | Analog input 1 |
| 2 | Analog GND |
| 3 | +Vb out |
| 4 | +VReference |

| EXP Connector | |
|---------------|---------|
| 1 | CAN+ |
| 2 | GND |
| 3 | +Vb out |
| 4 | CAN- |
| 5 | +Vbext |